

# a-Si TFT LCD Single Chip Driver with 320RGBx480 Resolution and 262K color

*Preliminary*  
**Application Notes**

Version: Preliminary V0.6  
Date: Aug. 16st 2011

**ILI TECHNOLOGY CORP.**

8F., No.38, Taiyuan St., Jhubei City, Hsinchu County 302, Taiwan (R.O.C.)


Tel.886-3-5600099; Fax.886-3-5600055

<http://www.ilitek.com>

1. CPT 3.5 INCH PANEL.....	3
1.1. APPLICATION CIRCUIT.....	3
1.2 CPT 3.5 INCH INITIAL CODE.....	4
2. HSD 3.5 inch Panel .....	7
2.1. application circuit.....	7
2.2 initial code.....	8
3. TM 3.2 inch Panel .....	11
3.1. application circuit.....	12
3.2 initial code.....	15
4. WTK 3.5 inch Panel.....	16
4.1. application circuit.....	13
4.2 initial ode.....	14
2.REVISION HISTORY.....	19

## 1. CPT 3.5 Inch Panel

### 1.1 Application circuit

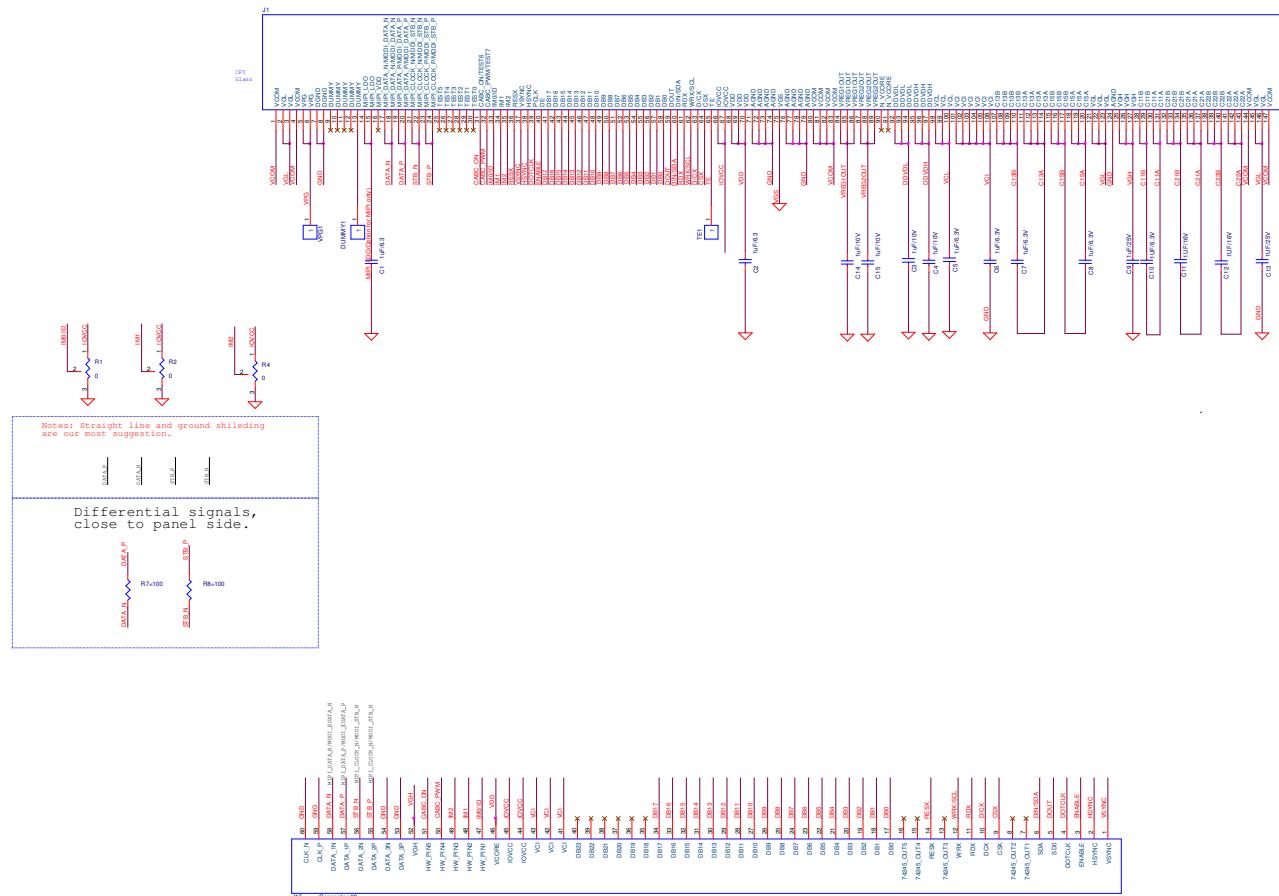

## 1.2CPT 3.5 Inch Initial Code

```
Void ILI9486_CPT_Initial_Code(void)
```

```
{// VCl=2.8V
```

```
***** Reset LCD Driver *****//
```

```
LCD_nRESET = 1;
```

```
Delayms(1); // Delay 1ms
```

```
LCD_nRESET = 0;
```

```
Delayms(10); // Delay 10ms // This delay time is necessary
```

```
LCD_nRESET = 1;
```

```
Delayms(120); // Delay 120 ms
```

```
***** Start Initial Sequence *****//
```

```
LCD_ILI9486_CMD(0XF2);
```

```
LCD_ILI9486_INDEX(0x18);
```

```
LCD_ILI9486_INDEX(0xA3);
```

```
LCD_ILI9486_INDEX(0x12);
```

```
LCD_ILI9486_INDEX(0x02);
```

```
LCD_ILI9486_INDEX(0XB2);
```

```
LCD_ILI9486_INDEX(0x12);
```

```
LCD_ILI9486_INDEX(0xFF);
```

```
LCD_ILI9486_INDEX(0x10);
```

```
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0XF8);
```

```
LCD_ILI9486_INDEX(0x21);
```

```
LCD_ILI9486_INDEX(0x04);
```

```
LCD_ILI9486_CMD(0XF9);
```

```
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_INDEX(0x08);
```

```
LCD_ILI9486_CMD(0x36);
```

```
LCD_ILI9486_INDEX(0x08);
```

```
LCD_ILI9486_CMD(0xB4);
```

```
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0xC1);
```

```
LCD_ILI9486_INDEX(0x41);
```

```
LCD_ILI9486_CMD(0xC5);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x53);
LCD_ILI9486_CMD(0xE0);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x1B);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0x0B);
LCD_ILI9486_INDEX(0x0E);
LCD_ILI9486_INDEX(0x09);
LCD_ILI9486_INDEX(0x47);
LCD_ILI9486_INDEX(0x94);
LCD_ILI9486_INDEX(0x35);
LCD_ILI9486_INDEX(0x0A);
LCD_ILI9486_INDEX(0x13);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x08);
LCD_ILI9486_INDEX(0x03);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0XE1);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x3A);
LCD_ILI9486_INDEX(0x37);
LCD_ILI9486_INDEX(0x0B);
LCD_ILI9486_INDEX(0x0C);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x4A);
LCD_ILI9486_INDEX(0x24);
LCD_ILI9486_INDEX(0x39);
LCD_ILI9486_INDEX(0x07);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x04);
LCD_ILI9486_INDEX(0x27);
LCD_ILI9486_INDEX(0x25);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0x11);
```

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*


```
Delayms(120);  
LCD_ILI9486_CMD(0x29);  
}
```

```
Void ILI9486_EnterSleep_Code(void)  
{  
LCD_ILI9486_CMD(0x28)  
Delayms(10);  
LCD_ILI9486_CMD(0x10); // Set_address_mode  
Delayms(120);  
}
```

```
Void ILI9486_ExitSleep_Code(void)  
{  
LCD_ILI9486_CMD(0x11); // Set_address_mode  
Delayms(120);  
LCD_ILI9486_CMD(0x29)  
}
```

## 2.HSD

## **2.1 HSD 3.5 INCH FPC**

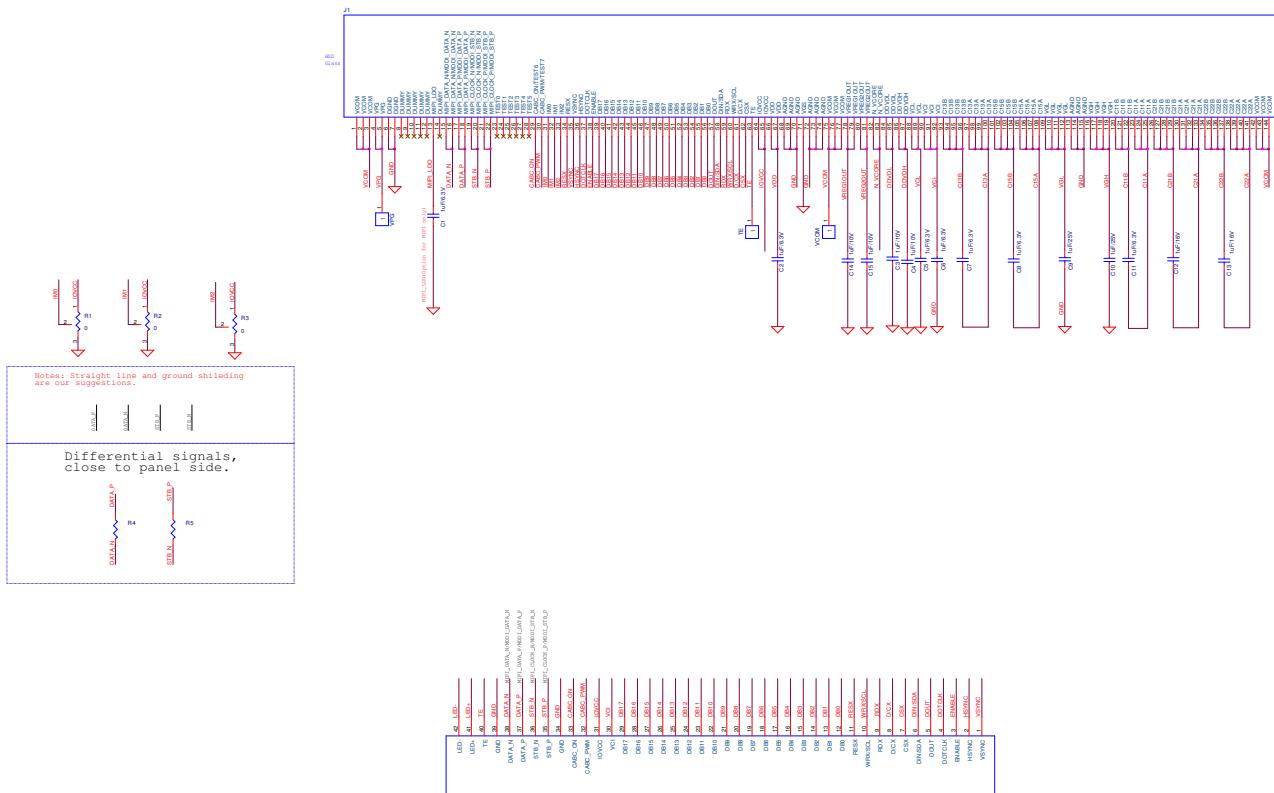

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*

## 2.2 HSD 3.5 Inch Initial Code

```
Void ILI9486_HSD_Initial_Code(void)
{ // VCl=2.8V
//***** Reset LCD Driver *****/
LCD_nRESET = 1;
Delayms(1); // Delay 1ms
LCD_nRESET = 0;
Delayms(10); // Delay 10ms // This delay time is necessary
LCD_nRESET = 1;
Delayms(120); // Delay 120 ms

//***** Start Initial Sequence *****/
LCD_ILI9486_CMD(0XF2);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0xA3);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0XB2);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0xFF);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0XF8);
LCD_ILI9486_INDEX(0x21);
LCD_ILI9486_INDEX(0x04);

LCD_ILI9486_CMD(0XF9);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0x36);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0xB4);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0xB6);
LCD_ILI9486_INDEX(0x02);
```

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*

```
LCD_ILI9486_INDEX(0x22);
```

```
LCD_ILI9486_CMD(0xC1);  
LCD_ILI9486_INDEX(0x41);
```

```
LCD_ILI9486_CMD(0xC5);  
LCD_ILI9486_INDEX(0x00);  
LCD_ILI9486_INDEX(0x18);
```

```
LCD_ILI9486_CMD(0xE0);  
LCD_ILI9486_INDEX(0x0F);  
LCD_ILI9486_INDEX(0x1F);  
LCD_ILI9486_INDEX(0x1C);  
LCD_ILI9486_INDEX(0x0C);  
LCD_ILI9486_INDEX(0x0F);  
LCD_ILI9486_INDEX(0x08);  
LCD_ILI9486_INDEX(0x48);  
LCD_ILI9486_INDEX(0x98);  
LCD_ILI9486_INDEX(0x37);  
LCD_ILI9486_INDEX(0x0A);  
LCD_ILI9486_INDEX(0x13);  
LCD_ILI9486_INDEX(0x04);  
LCD_ILI9486_INDEX(0x11);  
LCD_ILI9486_INDEX(0x0D);  
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0xE1);  
LCD_ILI9486_INDEX(0x0F);  
LCD_ILI9486_INDEX(0x32);  
LCD_ILI9486_INDEX(0x2E);  
LCD_ILI9486_INDEX(0x0B);  
LCD_ILI9486_INDEX(0x0D);  
LCD_ILI9486_INDEX(0x05);  
LCD_ILI9486_INDEX(0x47);  
LCD_ILI9486_INDEX(0x75);  
LCD_ILI9486_INDEX(0x37);  
LCD_ILI9486_INDEX(0x06);  
LCD_ILI9486_INDEX(0x10);  
LCD_ILI9486_INDEX(0x03);
```

```
LCD_ILI9486_INDEX(0x24);
LCD_ILI9486_INDEX(0x20);
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0x11);
Delayms(120);
LCD_ILI9486_CMD(0x29);
}
```

**Void ILI9486\_EnterSleep\_Code(void)**


```
{
LCD_ILI9486_CMD(0x28)
Delayms(10);
LCD_ILI9486_CMD(0x10);
Delayms(120);
}
```

**Void ILI9486\_ExitSleep\_Code(void)**

```
{
LCD_ILI9486_CMD(0x11);
Delayms(120);
LCD_ILI9486_CMD(0x29)
}
```

### **3.TM Panel**

## **3.1TM 3.2 INCH FPC Circuit**

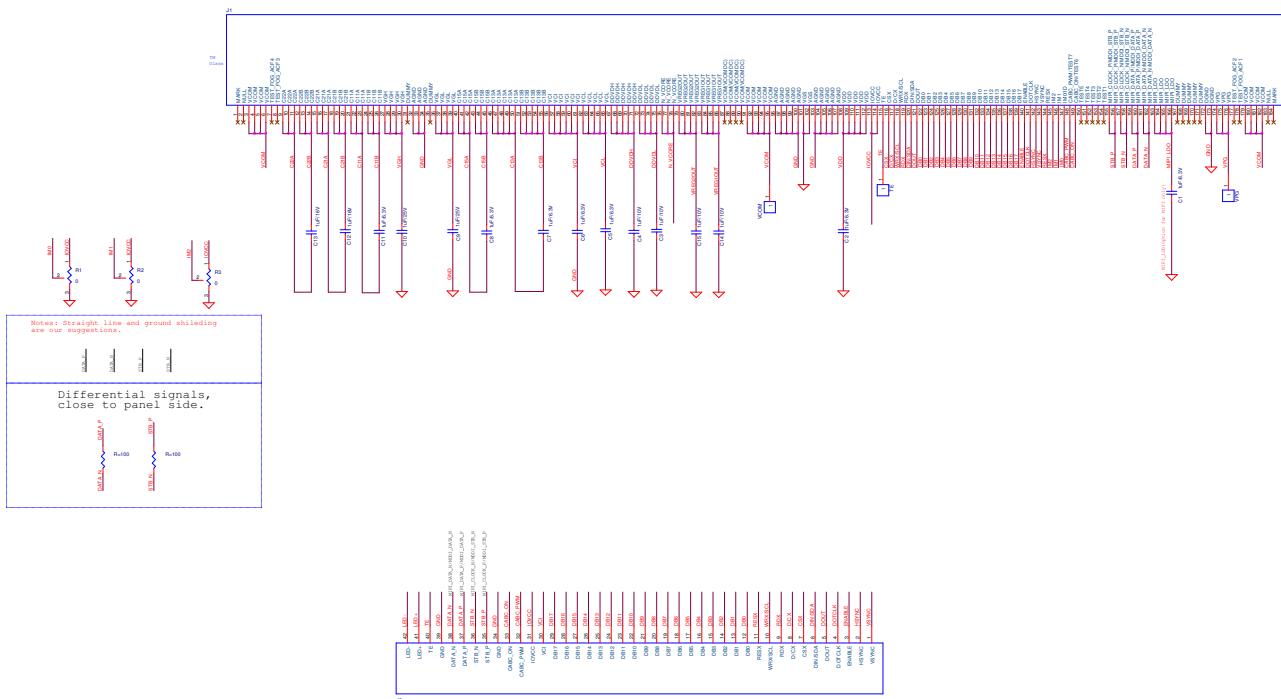

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*

## 3.2 TM 3.2 Inch Initial Code

```
Void ILI9486_TM_Initial_Code(void)
```

```
{// VCl=2.8V
//***** Reset LCD Driver *****/
LCD_nRESET = 1;
Delayms(1); // Delay 1ms
LCD_nRESET = 0;
Delayms(10); // Delay 10ms // This delay time is necessary
LCD_nRESET = 1;
Delayms(120); // Delay 120 ms
```

```
//***** Start Initial Sequence *****/
LCD_ILI9486_CMD(0XF2);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0xA3);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0XB2);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0xFF);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0XF8);
LCD_ILI9486_INDEX(0x21);
LCD_ILI9486_INDEX(0x04);
```

```
LCD_ILI9486_CMD(0XF9);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x08);
```

```
LCD_ILI9486_CMD(0x36);
LCD_ILI9486_INDEX(0x08);
```

```
LCD_ILI9486_CMD(0xB4);
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0xB6);
```

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*

```
LCD_ILI9486_INDEX(0x02);  
LCD_ILI9486_INDEX(0x22);
```

```
LCD_ILI9486_CMD(0xC1);  
LCD_ILI9486_INDEX(0x41);
```

```
LCD_ILI9486_CMD(0xC5);  
LCD_ILI9486_INDEX(0x00);  
LCD_ILI9486_INDEX(0x55);
```

```
LCD_ILI9486_CMD(0xE0);  
LCD_ILI9486_INDEX(0x0F);  
LCD_ILI9486_INDEX(0x21);  
LCD_ILI9486_INDEX(0x1C);  
LCD_ILI9486_INDEX(0x0B);  
LCD_ILI9486_INDEX(0x0E);  
LCD_ILI9486_INDEX(0x08);  
LCD_ILI9486_INDEX(0x49);  
LCD_ILI9486_INDEX(0x98);  
LCD_ILI9486_INDEX(0x38);  
LCD_ILI9486_INDEX(0x09);  
LCD_ILI9486_INDEX(0x11);  
LCD_ILI9486_INDEX(0x03);  
LCD_ILI9486_INDEX(0x14);  
LCD_ILI9486_INDEX(0x10);  
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0xE1);  
LCD_ILI9486_INDEX(0x0F);  
LCD_ILI9486_INDEX(0x2F);  
LCD_ILI9486_INDEX(0x2B);  
LCD_ILI9486_INDEX(0x0C);  
LCD_ILI9486_INDEX(0x0E);  
LCD_ILI9486_INDEX(0x06);  
LCD_ILI9486_INDEX(0x47);  
LCD_ILI9486_INDEX(0x76);  
LCD_ILI9486_INDEX(0x37);  
LCD_ILI9486_INDEX(0x07);
```

---

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*

```
LCD_ILI9486_INDEX(0x11);
LCD_ILI9486_INDEX(0x04);
LCD_ILI9486_INDEX(0x23);
LCD_ILI9486_INDEX(0x1E);
LCD_ILI9486_INDEX(0x00);
```


```
LCD_ILI9486_CMD(0x11);
Delayms(120);
LCD_ILI9486_CMD(0x29);
{
```

```
Void ILI9486_EnterSleep_Code(void)
{
LCD_ILI9486_CMD(0x28)
Delayms(10);
LCD_ILI9486_CMD(0x10);
Delayms(120);
}
```

```
Void ILI9486_ExitSleep_Code(void)
{
LCD_ILI9486_CMD(0x11);
Delayms(120);
LCD_ILI9486_CMD(0x29)
}
```

# **4 WTK 3.5 PANEL**

## 4.1 FPC CIRCUIT

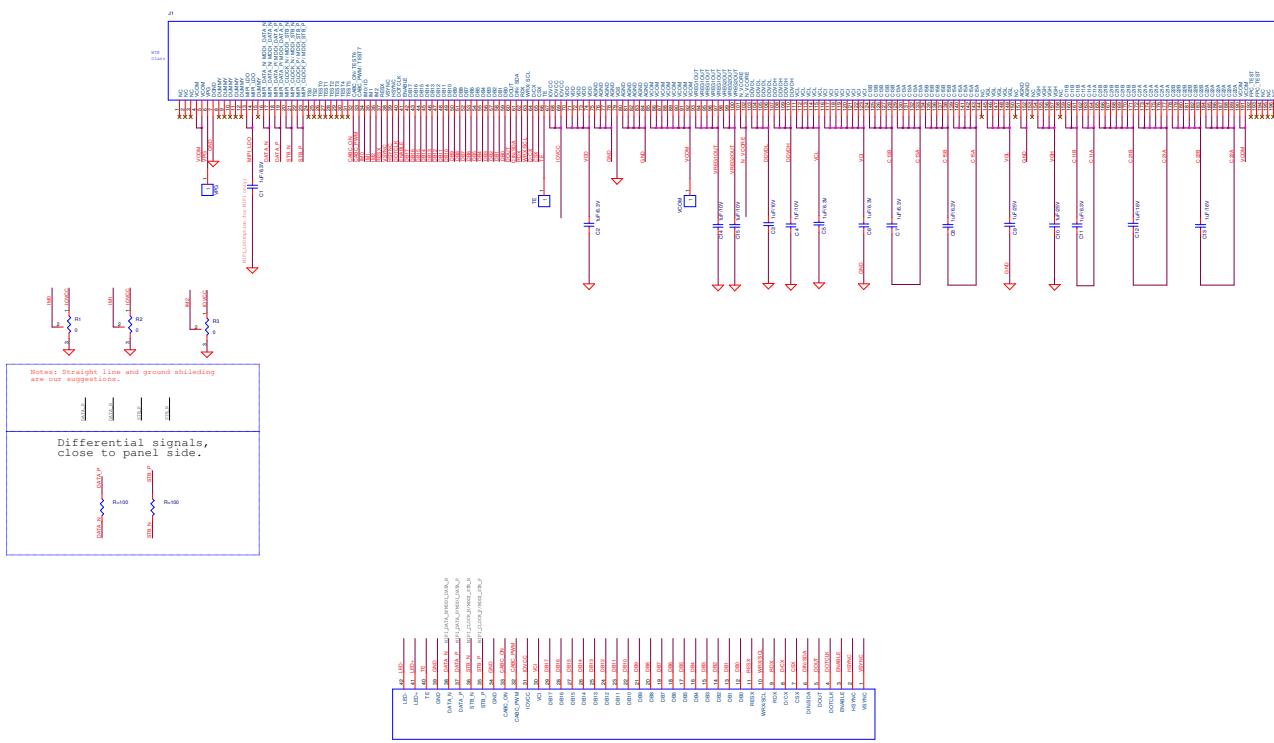

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*

## 4.2 WTK 3.5 Inch Initial Code

```
Void ILI9486_WTK_Initial_Code(void)
{ // VCl=2.8V
//***** Reset LCD Driver *****/
LCD_nRESET = 1;
Delayms(1); // Delay 1ms
LCD_nRESET = 0;
Delayms(10); // Delay 10ms // This delay time is necessary
LCD_nRESET = 1;
Delayms(120); // Delay 120 ms

//***** Start Initial Sequence *****/
LCD_ILI9486_CMD(0XF2);
LCD_ILI9486_INDEX(0x18);
LCD_ILI9486_INDEX(0xA3);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0XB2);
LCD_ILI9486_INDEX(0x12);
LCD_ILI9486_INDEX(0xFF);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x00);

LCD_ILI9486_CMD(0XF8);
LCD_ILI9486_INDEX(0x21);
LCD_ILI9486_INDEX(0x04);

LCD_ILI9486_CMD(0XF9);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0x21);

LCD_ILI9486_CMD(0x36);
LCD_ILI9486_INDEX(0x08);

LCD_ILI9486_CMD(0xB4);
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0xB6);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0x22);
```

```
LCD_ILI9486_CMD(0xC1);
LCD_ILI9486_INDEX(0x41);
```

```
LCD_ILI9486_CMD(0xC5);
LCD_ILI9486_INDEX(0x00);
LCD_ILI9486_INDEX(0x53);
```

```
LCD_ILI9486_CMD(0xE0);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x08);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x09);
LCD_ILI9486_INDEX(0x05);
LCD_ILI9486_INDEX(0x37);
LCD_ILI9486_INDEX(0x98);
LCD_ILI9486_INDEX(0x26);
LCD_ILI9486_INDEX(0x07);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x02);
LCD_ILI9486_INDEX(0x09);
LCD_ILI9486_INDEX(0x07);
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0xE1);
LCD_ILI9486_INDEX(0x0F);
LCD_ILI9486_INDEX(0x38);
LCD_ILI9486_INDEX(0x36);
LCD_ILI9486_INDEX(0x0D);
LCD_ILI9486_INDEX(0x10);
LCD_ILI9486_INDEX(0x08);
LCD_ILI9486_INDEX(0x59);
LCD_ILI9486_INDEX(0x76);
LCD_ILI9486_INDEX(0x48);
LCD_ILI9486_INDEX(0x0A);
LCD_ILI9486_INDEX(0x16);
```

---

*The information contained herein is the exclusive property of ILI Technology Corp. and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of ILI Technology Corp.*

```
LCD_ILI9486_INDEX(0x0A);
LCD_ILI9486_INDEX(0x37);
LCD_ILI9486_INDEX(0x2F);
LCD_ILI9486_INDEX(0x00);
```

```
LCD_ILI9486_CMD(0x11);
Delayms(120);
LCD_ILI9486_CMD(0x29);
}
```

**Void ILI9486\_EnterSleep\_Code(void)**

```
{
LCD_ILI9486_CMD(0x28)
Delayms(10);
LCD_ILI9486_CMD(0x10);
Delayms(120);
}
```

**Void ILI9486\_ExitSleep\_Code(void)**

```
{
LCD_ILI9486_CMD(0x11);
Delayms(120);
LCD_ILI9486_CMD(0x29)
}
```

## 2.Revision History

### *Revision History*

Version No.	Date	Page	Description
V0.1	2011/02/23		New creation
V0.2	2011/03/02		Add external component spec.
V0.3	2011/06/02		Add WTK TM HSD FPC and initial code
V0.4	2011/07/01		Add Vreg1out and Vreg2out capacitor
V0.5	2011/07/07		Suggest set to column inversion
V0.6	2011/08/16		Add F9 register for SRAM timing adjuster