
# VMB1BLS Single channel blind control module for universal mounting

# Manual





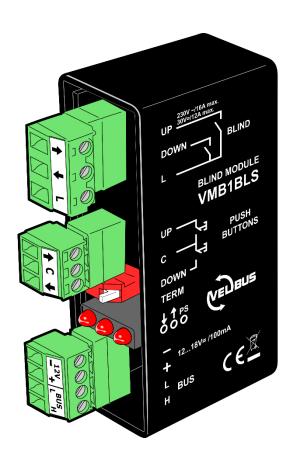

## Content

1.	De:	scription	3
		rts	
		ring diagram	
		In a Velbus domotics-installation	
	3.2.	Standalone	4
4.	Po:	ssibilities	5
	4.1.	As part of a Velbus installation	5
	4.2.	Standalone	5
5.	LEC	O indications	5
6.	Coi	nfiguration	6
	6.1.	General settings	7
	6.2.	Sunrise and sunset (deprecated – use program steps on input modules instead)	8
	6.3.	Alarms	10
7	Mο	ndes	10




## 1. Description

The VMB1BLS is a single channel control module for blinds and sunscreens. It has been developed for universal mounting. Thanks to its small size and the cast housing, the VMB1BLS can easily be put inside a shutter box.

The VMB1BLS can be added to a Velbus domotics system, or it can be installed on itself (standalone). In the first case, the VMB1BLS is being connected to the Velbus data bus and can communicate with the other Velbus modules. In the second case the module is being operated by one or two push buttons, which are connected directly.

#### 2. Parts

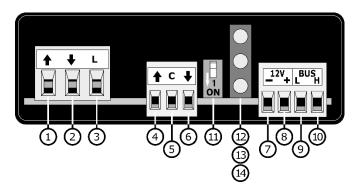

#### Connections

- 1 Motor up
- (2) Motor down
- (3) Line connection
- (4) Push button up
- (5) Push button common
- (6) Push button down
- 7 Bus supply -
- (8) Bus supply + (12..18 V DC)
- 9 Bus data L
- 10 Bus data H


#### Other elements


- ① Terminator
- (12) LED PS (power supply)
- (13) LED up
- (14) LED down

# 3. Wiring diagram

#### 3.1. In a Velbus domotics-installation








230 V AC motor

24 V DC motor


Please note that in a modular Velbus installation all the terminators (1) must be open, except two. The two closed terminators are located ideally as far as possible from each other.

## 3.2.Standalone

## Two-button operation




230 V AC motor



24 V DC motor

#### One-button operation

For a one-button operation, the push button is connected as follows:





## 4. Possibilities

## 4.1. As part of a Velbus installation

- Up/down with two different push buttons:
  - o short press will make the blind to go up or down until the end has been reached, or until the opposite direction has been pushed
  - o long press will make the blind to go up or down as long as the button is being pressed. When released, the motor stops.
- Up/down with one push button: same principle as above, but in one single button. The direction of the motor is reversed after every stop.
- Entirely up/entirely down: a push on the button will open or close the blind completely.
- Putting the blind on a certain position (expressed in percentages)
- The blind module can be put in different modes (max.3). Actions can be configured to work in all the modes or only in one particular mode (see modes on p.12).
- The blind channel can be locked, inhibited and forced
  - o Locking a channel makes it impossible to operate until it has been unlocked.
  - When inhibiting a channel, it still listens to the bus, but it stays inactive until the inhibition is released. When the inhibition is released, the channel reacts again on the signals, and will respond to the signals which were sent during the inhibit.
  - o Forcing a channel has the highest priority. When forced, a channel doesn't listen to the bus: every signal (except release of the force mode) will be ignored completely.

#### 4.2.Standalone

With two push buttons connected directly to the VMB1BLS, following operations are possible:

- short press (< 0,8 sec.) on up or down will move the blind until the end has been reached, or until the opposite direction has been pushed
- long press on up or down will move the blind in the wanted direction as long as the button is being pushed. When releasing the button, the motor stops

The one-button operations works following the same principles. The direction of the motor is reversed after every stop.

## 5. LED indications

- LED PS (power supply) (12):
  - o continuously on: power supply OK
  - o off: power supply not OK



- LED up (13):
  - o blinks while blind is going up
  - o continuously on when blind is completely up
- LED down (14):
  - o blinks while blind is going down
  - o continuously on when blind is completely down
- LED up (13) and LED down (14) will blink simultaneously as follows:
  - blink 2 times, pause, blink 2 times, etc...: bus error (only when address ≠ FF and the VMB1BLS is connected to a Velbus data bus)
  - o blink 3 times, pause, blink 3 times, etc...: power supply too low
  - o blink 4 times, pause, blink 4 times, etc...: power supply too high


# 6. Configuration



For a general explanation about installing and configuring Velbus, please consult the installation manual at <a href="https://www.velbus.eu">www.velbus.eu</a>.




Always use the latest version of Velbuslink (download for free at <u>www.velbus.eu</u> > Support > Downloads). Velbuslink 9.28 or higher required to work with the VMB1BLS.

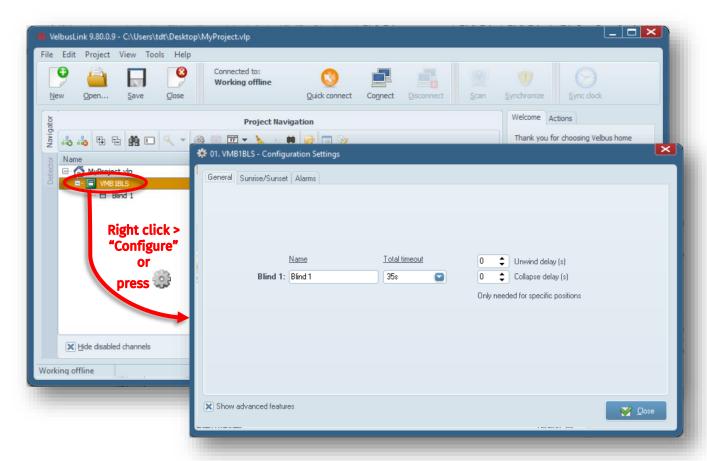



#### 6.1. General settings

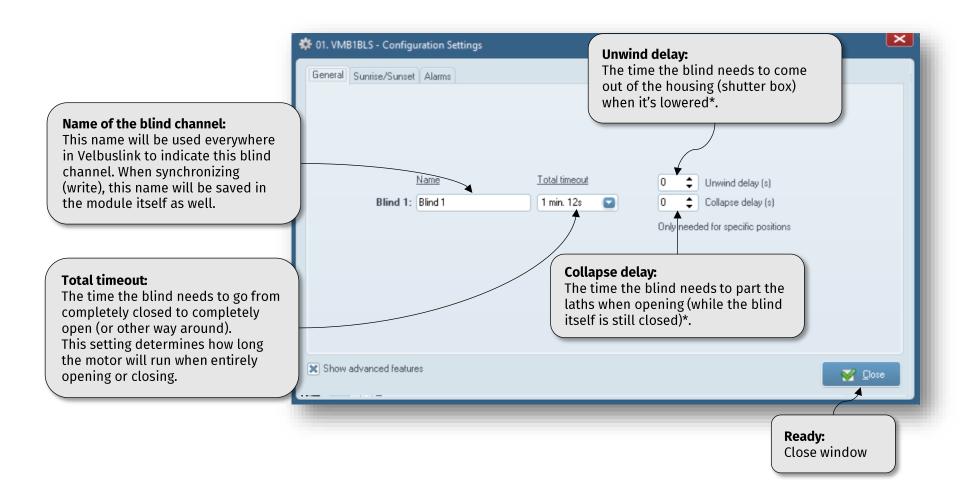

<sup>\*</sup> The unwind and collapse delay are being used to configure exactly the positioning of the blind.




www.velbus.eu

## 6.2.Sunrise and sunset (deprecated – use program steps on input modules instead)

8


If this tab is not visible, check "Show advanced features" at the bottom of the window.

Tab 1: Automation

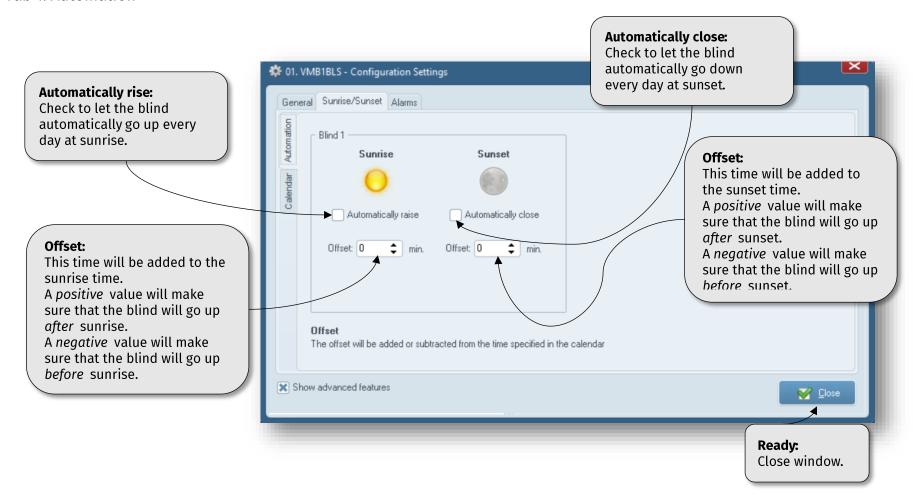



#### Tab 2: Calendar (deprecated)

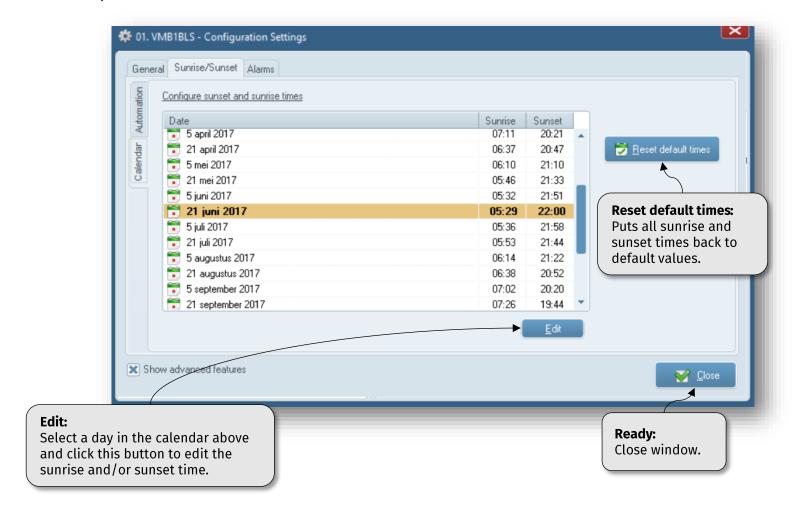

9



#### 6.3.Alarms

The tab "Alarms" is the same as with other modules with alarm times and groups. For a description of all the possibilities and configurations, see the other Velbus documentation files.

Remark: if "automatically raise at wakeup time and automatically close at bedtime" (tab Alarms) is configured in combination with "automatically raise/close" at sunrise or sunset (tab Sunrise/Sunset > automation), wakeup time and bedtime will have priority over sunrise and sunset. If sunrise or sunset is outside the period of wakeup time and bedtime, then "automatically raise/close" at sunrise or sunset will be ignored.

#### 7. Modes

Modes can be used for advanced programming.

The VMB1BLS is always in one of the four following states:

- no mode selected (standard)
- mode 1
- mode 2
- or mode 3

Only one mode can be active at the same time.

In the table below is shown which actions will work in which mode:

	Actions in mode 1 (nrs. 10-18)	Acties in mode 2 (nrs. 24-32)	Acties in mode 3 (nrs. 36-44)	All other actions
No mode selected	×	×	×	✓
Mode 1	✓	*	×	✓
Mode 2	×	✓	×	✓
Mode 3	×	×	✓	✓